Piston rod cylinder → Supplementary products

Round cylinder, Series ICS-D1-M00

► Ø 32 - 100 mm ► double-acting ► with magnetic piston ► cushioning: pneumatically, adjustable ► acid-proof ► suitable for use in food processing

001217641



a15

Working pressure min./max.	1 bar / 10 bar
Ambient temperature min./max.	-25°C / +70°C
Medium temperature min./max.	-25°C / +70°C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 mg/m³
Pressure for determining piston forces	6,3 bar

Materials:	
Cylinder tube	Stainless steel, acid-proof
Piston rod	Stainless steel, acid-proof
Front cover	Stainless steel, acid-proof
End cover	Stainless steel, acid-proof
Seal	Acrylonitrile Butadiene Rubber
Nut for piston rod	Stainless steel, acid-proof
Scraper	Polyethylene
Lubricant	ISO 21469 (NSF-H1)

Technical Remarks

- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of compressed air must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.
- Clamping piece for magnetic field sensor necessary

Piston Ø		**[mm]**	**32**	**40**	**50**	**63**	**80**
Retracting piston force		[N]	435	665	1039	1766	2857
Extracting piston force		[N]	507	792	1237	1964	3167
Cushioning length		[mm]	11.5	14	17	16	19
Cushioning energy		[J]	2.4	4.5	7.5	13.5	54
Weight	0 mm stroke	[kg]	0.6	1.2	1.7	3	4
	+10 mm stroke	[kg]	0.025	0.036	0.05	0.065	0.1
Stroke max.		[mm]	480	600	750	945	1200

Piston Ø		**[mm]**	**100**				
Retracting piston force		[N]	4639				
Extracting piston force		[N]	4948				
Cushioning length		[mm]	22				
Cushioning energy		[J]	88				
Weight	0 mm stroke	[kg]	7.7				
	+10 mm stroke	[kg]	0.135				
Stroke max.		[mm]	1500				

Configurable product

This product is configurable. Please use our Internet configurator at www.boschrexroth.com/pneumatics or contact the nearest Bosch Rexroth sales office.

Supplementary products
Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Piston rod cylinder → Supplementary products

Round cylinder, Series ICS-D1-M00

► Ø 32 - 100 mm ► double-acting ► with magnetic piston ► cushioning: pneumatically, adjustable ► acid-proof ► suitable for use in food processing

basic version, M00, Piston Ø 32 - 100

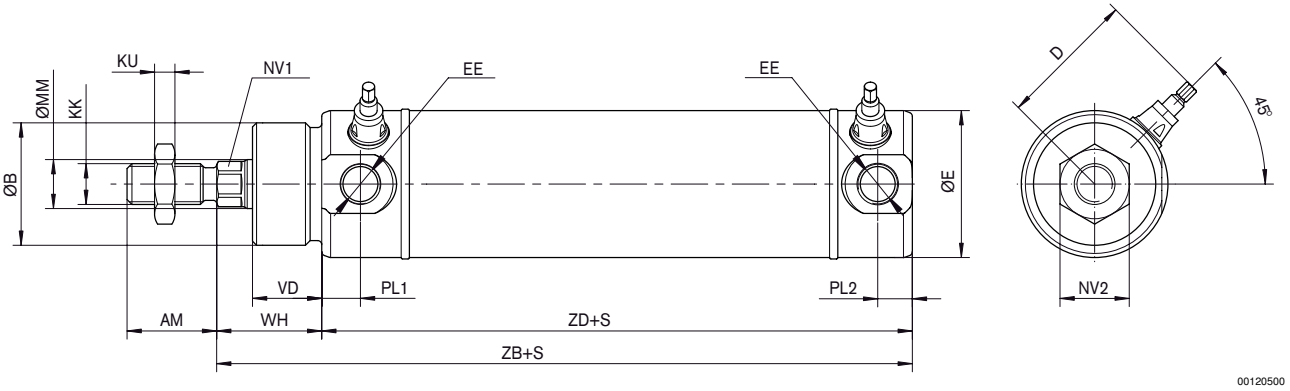

S = stroke, tolerance Ø 32–50 mm = +2/-0, Ø 63–100 mm = +2.5/-0. The cylinder is supplied with piston rod nuts in accordance with ISO 4035; DIN 439.

Ø	AM	Ø B e11	D 1)	Ø E	EE	KK	KU	MM g8	NV1	NV2	PL1	PL2	VD
32	22	30	34	36	G 1/8	M10x1,25	5	12	10	17	9.5	8.5	17
40	24	35	38	44	G 1/4	M12x1,25	6	16	13	18	11	11	25
50	32	40	50	54	G 1/4	M16x1,5	8	20	17	24	12	12	25
63	32	45	57	68	G 3/8	M16x1,5	8	20	17	24	14	13.5	30
80	40	55	70.5	86	G 3/8	M20x1,5	10	25	22	30	14	14	30
100	40	65	80.5	106	G 1/2	M20x1,5	10	25	22	30	20	19	30

Ø	WH	ZB	ZD
32	26	121	95
40	35	143	108
50	35	150	115
63	40	165	125
80	42	184	142
100	42	198	156

1) max.