Valve systems → Standardized valve systems

5/3-way valve, Series 581, size 4

► Qn = 5000 l/min ► plate connection ► Pilot valve width: 30x22 mm CNOMO ► compressed air connection output: Base plate ISO 5599-1 ► Electr. connection: Plug, ISO 4400, form A ► Manual override: with detent, without detent

00133530

Standards	ISO 5599-1
Version	Spool valve
Sealing principle	soft sealing
Blocking principle	Single base plate principle
Working pressure min./max.	See table below
Ambient temperature min./max.	-15°C / +50°C
Medium temperature min./max.	-15°C / +50°C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 mg/m³ - 5 mg/m³
Pneumatic ports	Base plate ISO 5599-1
Protection classwith electrical connector/ plug	IP 65
Duty cycle	100 %
Switch-on time	26 ms
Switch-off time	68 ms
Mounting screw	with hexagon socket
mounting screw tightening torque	10 Nm
Materials:	
Housing	Aluminum
Seals	Acrylonitrile Butadiene Rubber

Technical Remarks

- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.
- The oil content of compressed air must remain constant during the life cycle.
- Use only the approved oils from Bosch Rexroth, see chapter „Technical information“.

Operating voltage		Voltage tolerance		Power consumption	Switch-on power	Holding power
DC	AC 50 Hz	DC	AC 50 Hz	DC	AC 50 Hz	AC 50 Hz
				W	VA	VA
24 V	-	-10% / +10%	-	2	-	-
-	230 V	-	-10% / +10%	-	7	4.8

Valve systems → Standardized valve systems

5/3-way valve, Series 581, size 4

► Qn = 5000 l/min ► plate connection ► Pilot valve width: 30x22 mm CNOMO ► compressed air connection output: Base plate ISO 5599-1 ► Electr. connection: Plug, ISO 4400, form A ► Manual override: with detent, without detent

	MO	Operating voltage		Flow conductance	Qn	Working pressure min./ max.	Control pressure min./ max.	Compatibility index		Note	Part No.
		DC	AC 50 Hz	C							
				[l/(s*bar)]	[l/min]	[bar]	[bar]		[kg]		
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2)	**5814490650** 5814490450
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2); 4)	5814491650 5814491450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3)	5814492650 5814492450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3); 4)	5814493650 5814493450
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2)	**5814590650** 5814590450
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2); 4)	5814591650 5814591450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3)	5814592650 5814592450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3); 4)	5814593650 5814593450
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2)	5814790650 5814790450
		24 V -	- 230 V	15.5	5000	3 / 10	3 / 10	14	1.57	1); 2); 4)	5814791650 5814791450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3)	5814792650 5814792450
		24 V -	- 230 V	15.5	5000	-0.95 / 10	3 / 10	14	1.57	1); 3); 4)	5814793650 5814793450

MO = Manual override
1) A working pressure of up to 16 bar is possible in the version with manual override without detent.
2) Pilot: internal
3) Pilot: external
4) with throttle
Nominal flow Qn at 6 bar and Δp = 1 bar

5/3-way valve, Series 581, size 4

► Qn = 5000 l/min ► plate connection ► Pilot valve width: 30x22 mm CNOMO ► compressed air connection output: Base plate ISO 5599-1 ► Electr. connection: Plug, ISO 4400, form A ► Manual override: with detent, without detent
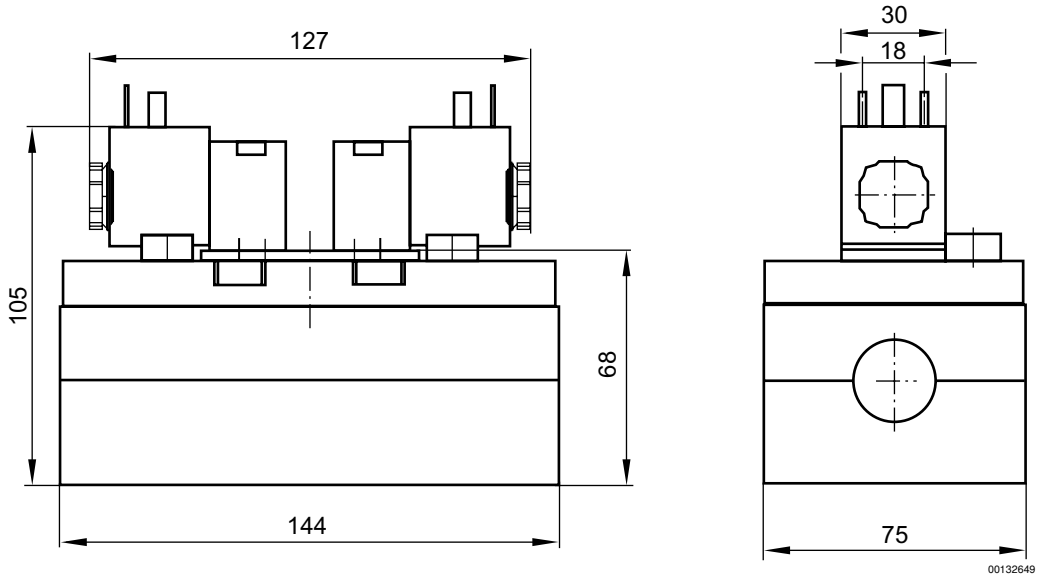
Dimensions